


# JUSTSOLAR MONO MODULE

JST158\*158-M-72-  
MH-415W



High conversion efficiency  
High module efficiency to guarantee power output.

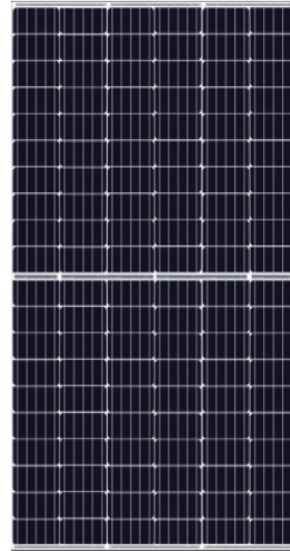

0 to +5W positive tolerance  
Detailed information in Electrical Specifications.




Self-cleaning glass  
Coating glass for self-cleaning, reduce surface dust.



48-hour response service



Outstanding low irradiation performance  
Excellent module efficiency even in the weak light conditions, such as morning or cloudy.

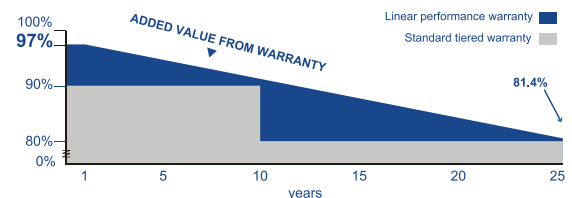

Excellent loading capability  
2400Pa wind loads, 5400Pa snow loads.

25

25-year performance warranty

10

10-year warranty on materials and workmanship

IEC 61215 Ed.2  
IEC 61730  
UL 1703



**JST** Solar

## ELECTRICAL DATA

Model Type	JST158*158-M-72-MH-415W
Peak Power (Pmax)/W	415
Module Efficiency/%	20.7
Maximum Power Voltage (Vmp)/V	40.28
Maximum Power Current (Imp)/A	10.31
Open Circuit Voltage (Voc)/V	49.13
Short Circuit Current (Isc)/A	10.82
Power Tolerance	0 to +5W
Maximum System Voltage	1500V
Nominal Operating Cell Temperature	44.4±2°C
Maximum Series Fuse Rating	15A

## MECHANICAL DATA

Cell Type	Monocrystalline, 9BB
Number of Cells	144 cells (6x12+6x12)
Weight	23kg
Dimension	2015x996x35mm
Max Load	5400 Pascals
Junction Box	IP68 rated
Connector	Twinsel PV-SY02, IP68
Wire Type	Compatible PV Wire


## TEMPERATURE CHARACTERISTICS

Temp. Coeff. of Isc (TK Isc)	0.04% /°C
Temp. Coeff. of Voc (TK Voc)	-0.28% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.37% /°C



## PACKING MANNER

Container	40' HQ
Pieces per Pallet	31
Pieces per Container	759

## PHYSICAL CHARACTERISTICS

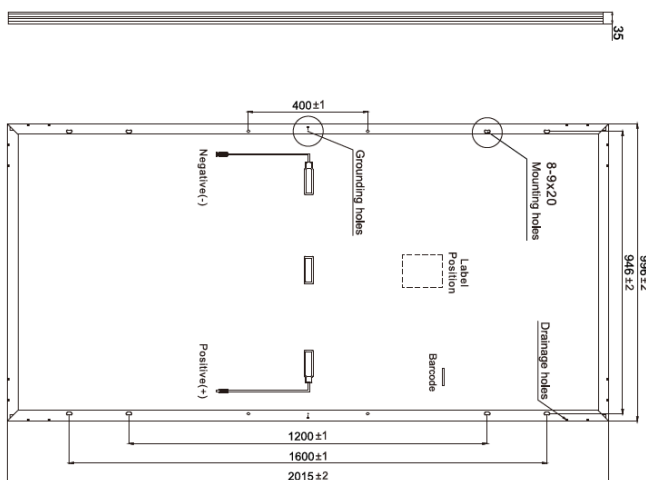

## ELECTRICAL CHARACTERISTICS

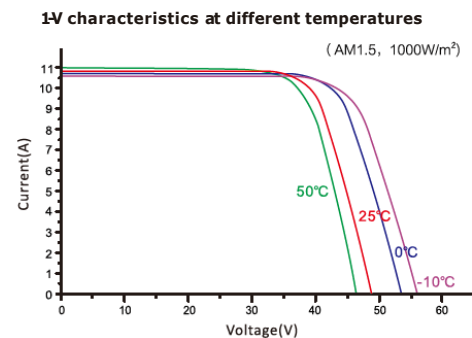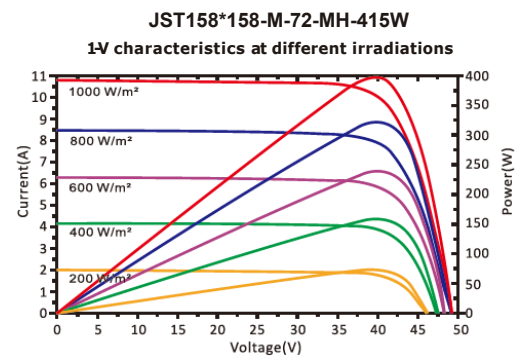

Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum.

Please contact support@jusolar.com for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.