

CY-450

Delivers **real power** in everyday winds

CY-450 Features



CY-450

The **most powerful turbine** on the market today for its size

High outputs

105W at 8m/s (17.8mph), 450W max

Power in everyday winds

In the cruising winds of 8 - 15 knots, 4 - 8m/s on land

Excellent value for money

Delivers the highest output for the lowest cost

Easy to install

Perfect where space is at a premium - yachts, telecoms towers and CCTV stations.

Robust

Designed for marine environments

Quiet

Quieter than the competition

Appreciated for being quiet thanks to our blade design


The CY-450 is the most powerful turbine of its size, able to provide meaningful power at everyday wind speeds, whilst being tough and robust enough to withstand storm force winds.

The CY-450's excellent power production stems from an exceptionally low start-up wind speed and superior transfer of power from the wind in everyday winds of 5-8m/s (11-18mph).

By fine tuning the characteristics of the alternator to work in perfect harmony with the operating parameters of the five rotor blades, the turbine can extract the right amount of torque, at the right RPM at a given wind speed, delivering a highly efficient transfer of power from the wind.

The CY450 is precision engineered in the UE with only two moving parts so little maintenance is required during the turbine's long operating life. It is marine quality finished - the aluminium alloy chassis and stainless steel components are protected from the elements with aerospace grade coatings and anodising.

CY-450 Technical Overview

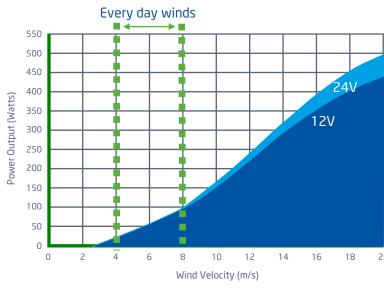

Rotor diameter - 1 metre

Rotor Type - 5-Blade upwind

Blade Material - Glass Reinforced, UV

resistant Nylon

Rated output - 105W at 8m/s (18mph,

15.5knots)

Peak output - 450W


Cut-in speed - 3m/s (6.7mph, 6knots)

Cut-out speed - None

Weight - 8Kg

Voltages - 12V, 24V, 48V DC, Grid-tie

Warranty - 2 years

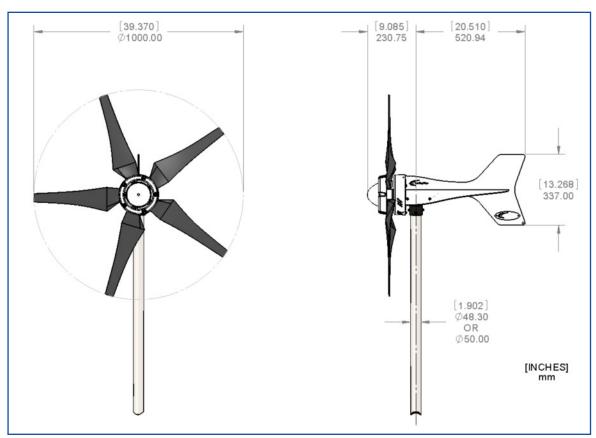

Rotational speed - 0-2000 rpm

Swept area - 0.785m²

Tip speed ratio - 6

Typical noise level - 6dB(A) above background

Alternator type - Direct drive, axial flux, 8 pole

permanent magnet generator

Design - 3-phase AC with rectification

Mounting - 48.3mm/50mm outer diameter pole

Materials - Aluminium alloy chassis, aerospace grade surface finish, epoxy coated stator coils, sealed bearings

Control system - Stall regulation

Brake system - Electromagnetic braking switch

Yaw system - Heavy duty slip ring assembly,

1043mm turning circle

CY-450 Applications



- Marine
- Security
- Telecommunications
- LED Lighting systems
- Road signage
- Telemetry

Our CY-450 horizontal axis turbine addresses the increasing demand for power on small scale off-grid renewable energy systems and grid connected applications. It is as much at home on land as on the water in a variety of applications.